


## Media – Bus Drop Tee

- Mini-Change® drop – std tee
- Mini-Change drop – wye
- Micro-Change® drop – std tee

A variety of DeviceNet tees can be used to tap into the trunk line to add a drop connection. Both female Mini-Change and Micro-Change connections are available as the drop portions of the connector. The standard drop tee is also available with a cap for protected diagnostic connections. All of the trunk line connections are DeviceNet standard connections. Tees can be mated with all other devices on the network of the same connector style. For overhead trunk lines the Wye configuration is ideally suited to bring the trunk line down to the drop connection to stay within the allowable 6m drop length.



- Phosphor bronze contacts for greatest reliability
- Variety of Mini-Change and Micro-Change configurations for maximum installation flexibility

## Media – Bus Drop Tee

### Specifications

### DIMENSIONS

#### Bus Drop Tee

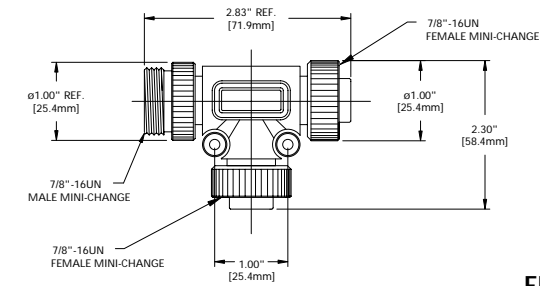


FIG 1

#### Bus Drop Wye

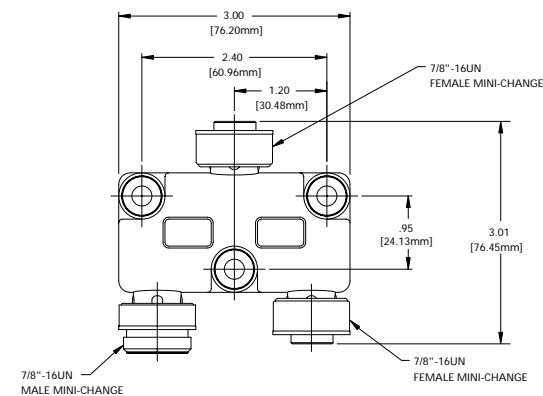


FIG 2

#### Bus Drop Micro Tee

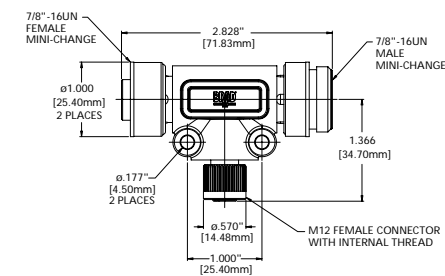


FIG 3

#### Micro-Micro-Micro Tee

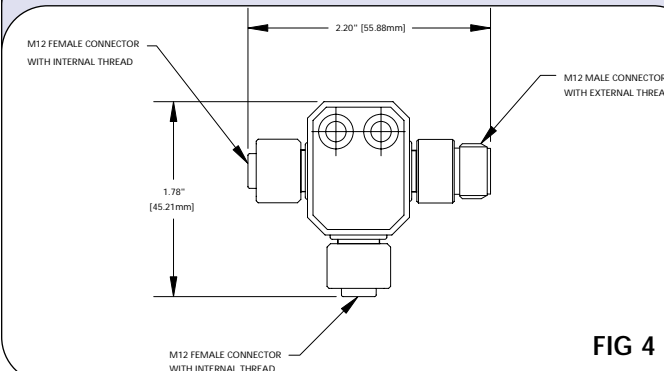


FIG 4

- MECHANICAL**
- CONNECTOR FACE: MINI-CHANGE DROP TEE – TPE  
MICRO-CHANGE DROP TEE – PCV
- MOLDED BODY: MINI-CHANGE DROP TEE – TPE  
MICRO-CHANGE DROP TEE – PCV
- COUPLING NUT: ZINC DIE CAST BLACK E-COAT  
MICT555 – NICKEL-PLATED BRASS
- ELECTRICAL**
- VOLTAGE RATING: 50V
- AMPERAGE: MINI-CHANGE DROP – 8A  
MICRO-CHANGE DROP – 3A
- CONTACT MATERIAL: PHOSPHOR BRONZE ALLOY
- CONTACT PLATING: GOLD OVER NICKEL ALLOY
- ENVIRONMENTAL**
- PROTECTION: MINI-CHANGE – IP67  
MICRO-CHANGE – IP68, NEMA 6P
- AMBIENT OPERATING TEMP: MINI-CHANGE – -4° TO 176° F (-20° TO 80° C)  
MICRO-CHANGE – 32° TO 140° F (0° TO 60° C)

### Drop Tee/Wye

LEFT TRUNK CONNECTION FEMALE FACE VIEW	FIG	MOLDED BUS DROP TEE/WYE	RIGHT TRUNK CONNECTION MALE FACE VIEW	DROP FEMALE CONNECTOR FACE VIEW
	1 AND 5	DN3020		
	1 AND 5	DN3020CAP		
	2 AND 5	DN3200		
LEFT TRUNK CONNECTION FEMALE FACE VIEW	FIG	MOLDED BUS DROP MICRO	RIGHT TRUNK CONNECTION MALE FACE VIEW	DROP FEMALE CONNECTOR FACE VIEW
	3 AND 5	DND3020		
LEFT TRUNK CONNECTION FEMALE FACE VIEW	FIG	MOLDED MICRO-BUS DROP	RIGHT TRUNK CONNECTION MALE FACE VIEW	DROP FEMALE CONNECTOR FACE VIEW
	4 AND 5	MICT555		

For stainless steel coupling nut add suffix "SS" to standard catalog number

### SCHEMATICS

#### Bus Drop Tee

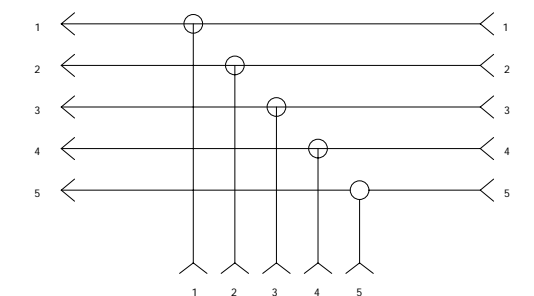


FIG 5